PGK 50-30-3-2,0 Duct cooler

Article number: 6608

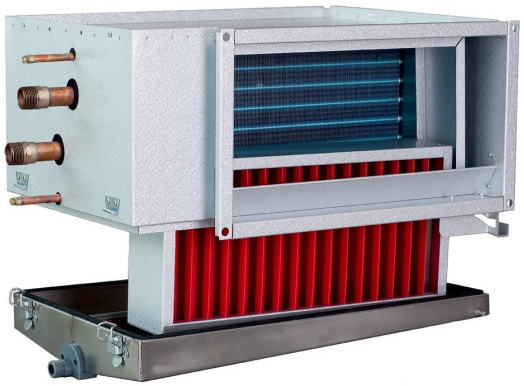

Description

Cold water-cooling battery for rectangular ducts.

Casing from galvanised sheet steel. Water battery from copper tubes and aluminium fins. Air vent and drain valve included. Drip pan from stainless steel and condensate connection (G½"). Max working pressure 1.0 MPa (10 bar). For water connection left or right. Two inspection covers for cleaning and maintenance. Droplet separator DE as an accessory regardless of air direction. Recommended for air velocities from 2,5 m/s.

Technical parameters

Dimensions and weights		
Duct dimension, inlet (height x width)	300 x 500	mm
Duct dimension, outlet (height x width)	300 x 500	mm
Weight	14.4	kg
Others		
Duct cooler/heater	Cooling coil, water	
Duct connection type	Rectangular	

Dimension

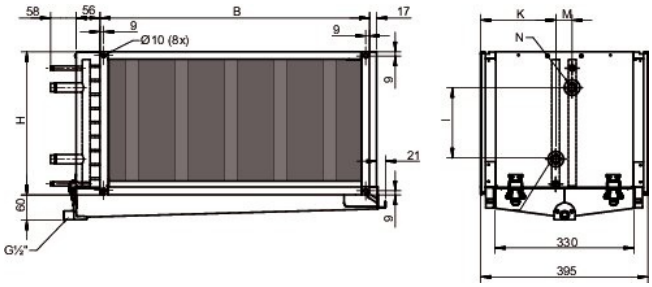

B	H	I	K	M	N	DE
538	338	175	176	43	R 3/4"	DE 50x30

Accessories

- AQUA 24TF Heat Regulator (5136)
- TG-A1/PT1000 Surface sensor (7284)
- TG-K330 Duct Sensor 0-30°C (5160)
- Optigo OP 10-230 (7283)
- RVAZ4 24A Actuator 0-10V (9862)
- ZTR 20-2,5 valve 3-way (9677)
- Optigo OP 10 (7282)
- TG-A130 Surface sensor 0-30°C (5159)
- DE 50x30 dropelemin. PGK/DXRE (7042)
- Optigo OP 5 (13891)
- RVAZ4-24 Actuator 3points (9798)
- ZTV 20-2,5 2-way valve (9825)

Documents

- INSTALLATION_INSTRUCTION_PGK_MULTILINGUAL.PDF
- Conformity_decl. PGK, VBR, DXRE, VBC, CWK.pdf